


TIMING BELT IDLER PULLEYS

GROOVED O.D. – LESS DRIVING TEETH

FOR
32 PITCH
TIMING BELTS

MAY BE USED AS TENSIONER FOR 32 PITCH BELTS

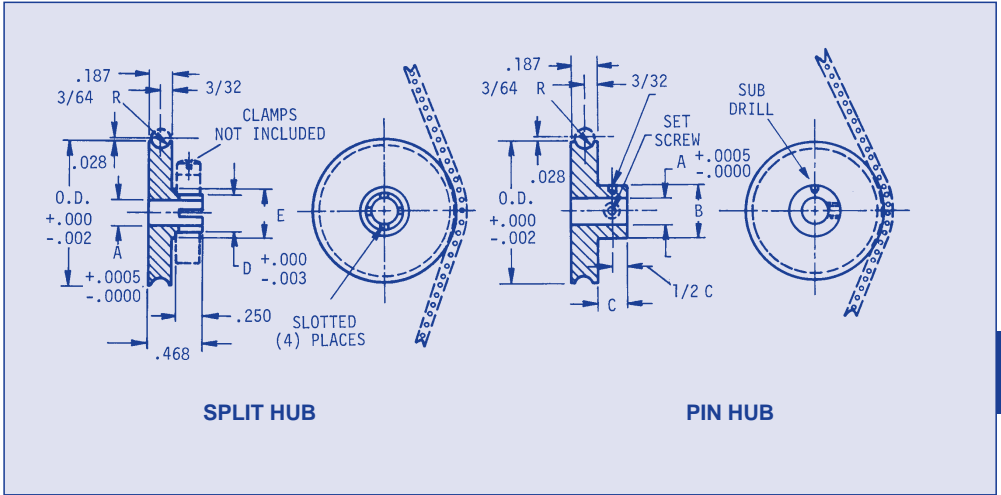

Material: 303 Stainless Steel.

Split Hub	Pin Hub								
Cat. No.	Cat. No.	Shaft Size	O.D.	A	B	C	D	E	Set Screw
FNS-P1-1	FOS-P1-1	1/8	.500	.1248	.312	.187	.188	1/4	#2-56
FNS-P1-2	FOS-P1-2		.750						
FNS-P1-3	FOS-P1-3		1.000						
FNS-P1-4	FOS-P1-4		1.500						
FNS-P1-5	FOS-P1-5		2.000						
FNS-P2-6	FOS-P2-6	3/16	.500	.1873	.375	.218	.250	5/16	#4-40
FNS-P2-7	FOS-P2-7		.750						
FNS-P2-8	FOS-P2-8		1.000						
FNS-P2-9	FOS-P2-9		1.500						
FNS-P2-10	FOS-P2-10		2.000						
FNS-P3-11	FOS-P3-11	1/4	.500	.2498	.500	.250	.312	3/8	#6-32
FNS-P3-12	FOS-P3-12		.750						
FNS-P3-13	FOS-P3-13		1.000						
FNS-P3-14	FOS-P3-14		1.500						
FNS-P3-15	FOS-P3-15		2.000						
FNS-P3-16	FOS-P3-16		2.500						
FNS-P3-17	FOS-P3-17		3.000						

For split hub clamp selection see catalog section B.

NORDEX

(800) 243-0986
In CT (203) 775-4877

32F

F