


# TIMING BELT-PULLEYS 3 MM PITCH

**FOR BELTS  
9MM WIDE**

Tooth Profile

HTD® SERIES

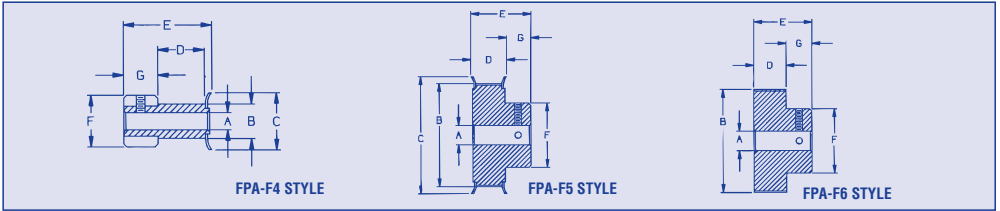

**Material: Aluminum Alloy.** Dimensions in inches. Not for use with FMX series belts.  
**Finish: Anodized.** For pure metric - please inquire. **See FPX-B2 for 3MM pitch HTD Belts.**

Cat. No.	No. of Grooves	Bore +.001 -.000 A	Pitch Diameter	O.D. * B	Flange O.D. ±1/64 C	Face Width D	Overall Length ±1/64 E	Hub Diameter ± 1/64 F	Hub Proj. G
FPA-F4-10	10	.125	.376	.346	.505	.401	11/16	.505	15/64
FPA-F4-11	11		.414	.384	.530			.530	
FPA-F4-12	12		.451	.421	.580			.580	
FPA-F4-13	13		.489	.459	.610			.610	
FPA-F4-14	14	.1875	.526	.496	.635	.506	13/16	.635	19/64
FPA-F4-15	15		.564	.534	.685			.685	
FPA-F4-16	16		.602	.572	.710			.710	
FPA-F4-17	17		.639	.609	.740			.740	
FPA-F5-18	18	.250	.677	.647	.790	.506	13/16	.442	19/64
FPA-F6-18	18		.714	.684	.815			.468	
FPA-F5-19	19		.752	.722	.895			.500	
FPA-F6-19	19		.827	.797	.945			.562	
FPA-F5-20	20	.250	.902	.872	1.025	.506	13/16	.625	19/64
FPA-F6-24	24		.940	.910	1.060			.625	
FPA-F5-25	25		.977	.947	1.105			.701	
FPA-F6-25	25		1.053	1.023	1.173			.776	
FPA-F5-26	26	.250	1.128	1.098	1.250	.506	13/16	.851	19/64
FPA-F6-30	30		1.203	1.173	1.323			.921	
FPA-F5-32	32		1.278	1.248	1.398			1.000	
FPA-F6-32	32		1.353	1.323	1.473			1.075	
FPA-F5-34	34	.250	1.429	1.399	1.549	.527	27/32	1.150	19/64
FPA-F6-34	34		1.504	1.474	1.625			1.300	
FPA-F5-36	36		1.654	1.624	1.775			1.300	
FPA-F6-36	36		1.805	1.775	1.850			1.300	
FPA-F5-38	38	.3125	2.105	2.075	-	.500	7/8	1.250	3/8
FPA-F6-38	38		2.256	2.226	-			1.250	
FPA-F5-40	40		2.331	2.301	-			1.250	
FPA-F6-40	40		2.707	2.677	-			1.250	
FPA-F5-44	44	.3125	2.105	2.075	-	.500	7/8	1.250	3/8
FPA-F6-44	44		2.256	2.226	-			1.250	
FPA-F5-48	48		2.331	2.301	-			1.250	
FPA-F6-48	50		2.707	2.677	-			1.250	
FPA-F6-56	56	.3125	2.105	2.075	-	.500	7/8	1.250	3/8
FPA-F6-60	60		2.256	2.226	-			1.250	
FPA-F6-62	62		2.331	2.301	-			1.250	
FPA-F6-72	72		2.707	2.677	-			1.250	

HTD® Trademark Gates

\*O.D. Tolerances

10-26 grooves +.002, -.000  
 28-48 grooves +.003, -.000  
 50-72 grooves +.004, -.000

**49F (800) 243-0986**  
 In CT (203) 775-4877

**NORDEX**