


TIMING BELT PULLEYS

5 MM PITCH

**FOR
BELTS
15 MM WIDE**

Tooth Profile

HTD® SERIES

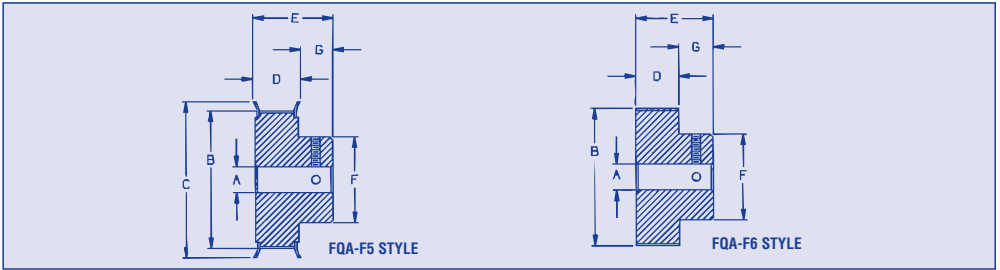

Material: Aluminum Alloy. **Dimensions in inches.** For pure metric - please inquire.
Finish: Anodized. **See QFX-B2 series for 5MM pitch HTD belts.**

Cat. No.	No. of Grooves	Bore +.001 -.000 A	Pitch Diameter	O.D. * B	Flange O.D. ±1/64 C	Face Width D	Overall Length ± 1/64 E	Hub Diameter ±1/64 F	Hub Proj. G
QFA-F5-12 QFA-F6-12	12	.250	.752	.707	7/8	25/32	1-1/32	7/16	1/4
QFA-F5-13 QFA-F6-13	13		.815	.770	15/16			1/2	
QFA-F5-14 QFA-F6-14	14		.877	.832	1			9/16	
QFA-F5-15 QFA-F6-15	15		.940	.895	1-1/16			5/8	
QFA-F5-16 QFA-F6-16	16		1.008	.958	1-3/32			11/16	
QFA-F5-17 QFA-F6-17	17	.250	1.065	1.020	1-3/16	25/32	1-3/32	3/4	
QFA-F5-18 QFA-F6-18	18		1.128	1.083	1-1/4			13/16	
QFA-F5-19 QFA-F6-19	19		1.191	1.146	1-5/16			15/16	
QFA-F5-20 QFA-F6-20	20		1.253	1.208	1-3/8			1	
QFA-F5-22 QFA-F6-22	22		1.379	1.334	1-1/2			1-1/16	
QFA-F5-24 QFA-F6-24	24	.250	1.504	1.459	1-5/8	25/32	1-3/32	1-1/16	5/16
QFA-F5-25 QFA-F6-25	25		1.566	1.521	1-11/16			1-3/16	
QFA-F5-26 QFA-F6-26	26		1.629	1.564	1-3/4			1-1/4	
QFA-F5-28 QFA-F6-28	28		1.754	1.709	1-7/8			1-3/8	
QFA-F5-30 QFA-F6-30	30		1.880	1.835	2			1-1/2	
QFA-F5-32 QFA-F6-32	32	.250	2.005	1.960	2-1/8	25/32	1-3/32	1-1/4	
QFA-F5-34 QFA-F6-34	34		2.130	2.085	2-1/4			1-3/8	
QFA-F6-36 QFA-F6-38 QFA-F6-40	36 38 40		.3125	2.256 2.381 2.506	2.211 2.336 2.461			-	1-3/16

* O.D. Tolerances - 12-16 grooves +.002, -.000
 17-32 grooves +.003, -.000
 34-40 grooves +.004, -.000

12, 13 grooves - 1 set screw
 14-40 grooves - 2 set screw @ 90°

NORDEX

HTD® Trademark Gates

(800) 243-0986
 In CT (203) 775-4877

54F