


PULLEY STOCK

**8 MM
PITCH**

Tooth Profile

HTD® SERIES

SHANK DIAMETER AND LENGTH AT NORDEX OPTION

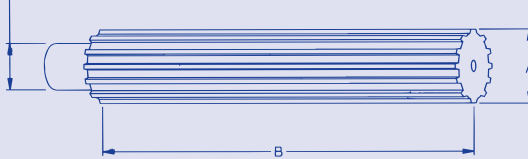

* O.D.TOLERANCE

20-40 grooves	+0.04
	-0.00
42-70 grooves	+0.05
	-0.00
72-80 grooves	+0.06
	-0.00

Material: Aluminum Alloy.

See FRX-A1 & B2 series for 8MM HTD Belts

Cat. No.	No. Grooves	Metric O.D. A	Inch O.D.* A	Metric P.D.	Inch P.D.	Usable Length
						B Inch MM
FRA-F8-20	20	49,78	1.960	50,95	2.006	<u>10</u> 254
FRA-F8-21	21	52,32	2.060	53,49	2.106	
FRA-F8-22	22	54,66	2.152	56,03	2.206	
FRA-F8-23	23	57,20	2.252	58,57	2.306	
FRA-F8-24	24	59,74	2.352	61,11	2.406	<u>10</u> 254
FRA-F8-25	25	62,28	2.452	63,65	2.506	
FRA-F8-26	26	64,85	2.553	66,22	2.607	
FRA-F8-28	28	70,08	2.759	71,30	2.807	
FRA-F8-30	30	75,13	2.958	76,40	3.008	<u>10</u> 254
FRA-F8-32	32	80,16	3.156	81,48	3.208	
FRA-F8-34	34	85,22	3.355	86,59	3.409	
FRA-F8-35	35	87,76	3.455	89,13	3.509	
FRA-F8-36	36	90,30	3.555	91,67	3.609	<u>10</u> 254
FRA-F8-38	38	95,40	3.756	96,77	3.810	
FRA-F8-40	40	100,48	3.956	101,85	4.010	
FRA-F8-42	42	105,59	4.157	106,96	4.211	<u>10</u> 254
FRA-F8-44	44	110,67	4.357	112,04	4.411	
FRA-F8-45	45	113,21	4.457	114,58	4.511	
FRA-F7-48	48	120,85	4.758	122,22	4.812	<u>8</u> 200
FRA-F7-49	49	123,39	4.858	124,76	4.912	
FRA-F7-50	50	125,96	4.959	127,33	5.013	
FRA-F7-56	56	141,22	5.560	142,60	5.614	
FRA-F7-60	60	151,41	5.961	152,78	6.015	
FRA-F5-62	62	157,89	6.216	157,89	6.216	<u>6</u> 150
FRA-F5-64	64	162,97	6.416	162,97	6.416	
FRA-F5-65	65	165,53	6.517	165,51	6.516	
FRA-F5-70	70	178,26	7.018	178,26	7.018	
FRA-F5-72	72	183,34	7.218	183,34	7.218	<u>6</u> 150
FRA-F5-75	75	190,98	7.519	190,98	7.519	
FRA-F5-80	80	203,71	8.020	203,71	8.020	

Other sizes and material available on request. For 8MM glanges, please inquire.

NORDEX

HTD® Trademark Gates

(800) 243-0986
In CT (203) 775-4877

56F