


# TIMING BELT PULLEYS

3/8" PITCH (.375" C.P.)

**FOR  
BELTS  
1/2 WIDE**

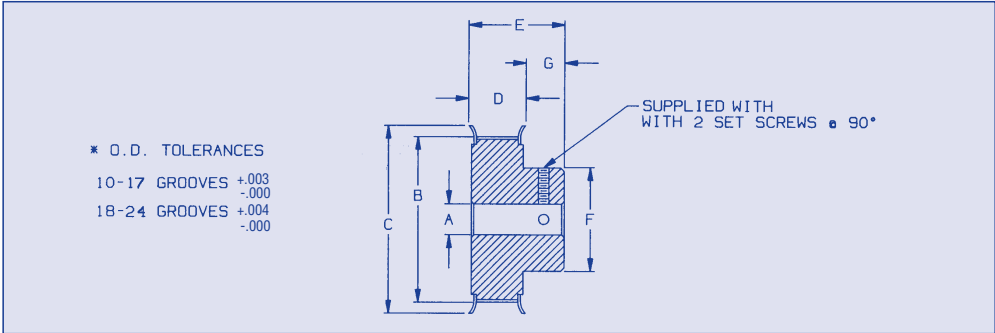

**Material:** Aluminum Alloy.  
**Finish:** Anodized.

See pages 74F for 3/8 pitch belts.

Cat. No.	No. of Grooves	Bore +.001 -.000 A	Pitch Diameter	Outside Dia. * B	Flange O.D. ±1/64 C	Flange Width D	Overall Length ±1/64 E	Hub Dia. ± 1/64 F	Hub Proj. G
FYA-D4-10 FYA-D5-10	10	.375 .500	1.194	1.164	1-7/16	3/4	1-1/8	7/8	13/32
FYA-D4-11 FYA-D5-11	11	.375 .500	1.313	1.283	1-17/32			1	
FYA-D4-12 FYA-D5-12	12	.375 .500	1.432	1.402	1-21/32		1-1/4	1-1/8	15/32
FYA-D4-13 FYA-D5-13	13	.375 .500	1.552	1.522	1-25/32			1-1/4	
FYA-D4-14 FYA-D5-14	14	.375 .500	1.671	1.641	1-29/32			1-1/4	
FYA-D4-15 FYA-D5-15	15	.375 .500	1.790	1.760	2-1/32			1-1/4	
FYA-D5-16 FYA-D6-16	16	.500 .625	1.910	1.880	2-1/8		1-3/8	1-7/16	17/32
FYA-D5-17 FYA-D6-17	17	.500 .625	2.029	1.999	2-1/4			1-1/2	17/32
FYA-D5-18 FYA-D6-18	18	.500 .625	2.149	2.119	2-3/8			1-5/8	
FYA-D5-19 FYA-D6-19	19	.500 .625	2.268	2.238	2-1/2			1-11/16	19/32
FYA-D5-20 FYA-D6-20	20	.500 .625	2.389	2.357	2-5/8		1-13/16		
FYA-D5-21 FYA-D6-21	21	.500 .625	2.507	2.479	2-3/4		1-7/16	2	5/8
FYA-D5-22 FYA-D6-22	22	.500 .625	2.626	2.596	2-7/8		1-1/2	2-1/8	
FYA-D5-24 FYA-D6-24	24	.500 .625	2.865	2.835	3-3/32			2-1/4	